


LED Power (W)	70	90	150	200
System Power (W)	77	100	165	220
Typical Luminous Flux (lm)	9,500	12,000	20,000	26,000

Color Temp : 4000K / 5000K  
 CRI : > 80  
 Beam profile : 120° (symmetric circular spread)  
 Input Voltage : 90-305 VAC, 50/60Hz  
 Power Factor : > 0.98/115VAC, > 0.95/230VAC  
 Dimming : Available with 1-10V and PWM  
 Life-span : > 50,000 hours  
 Working Temp : -40°c to +50°c  
 Storage Temp : -40°c to +65°c  
 IP Rating : IP40 / IP65  
 Net Weight : 3.6kg for 70 and 90W,  
 5.6kg for 150W, 6.2kg for 200W


\* Please contact our sales for detail product information.  
 \* Tested with LUXEON 3030 at 5000K, tolerance +/-10%

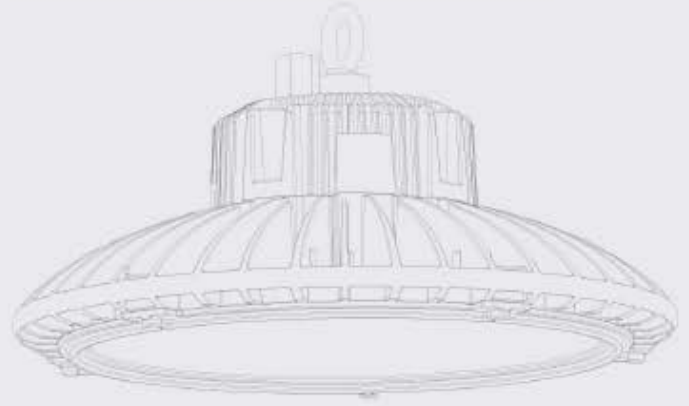



### Photometric Distribution

Height (M)	Eavg (LUX)	Emax (LUX)	Diameter (cm)
2	500	1747	625
4	125	437	1250
6	56	194	1875
8	31	109	2500
10	20	70	3125

-150

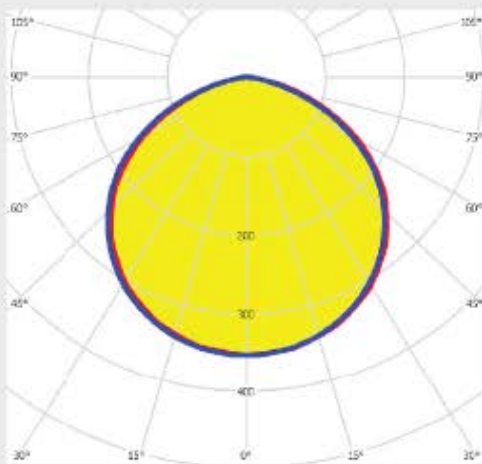

### Product Dimensions

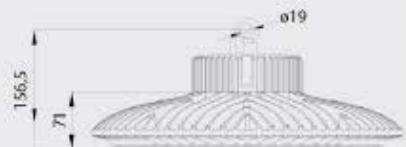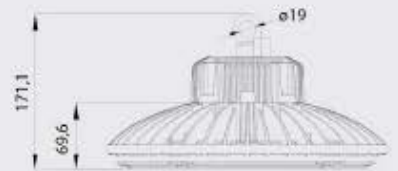

**MAXI LED**

Une division de  
 Next<sub>ENER</sub>  
 Tel: 04 75 601 113  
 www.maxi-led.fr