maxi led
L'éclairage LED des professionnels
www.maxi-led.fr
04 75 601 113

135 Chemin de Volte
26250 Livron/Drome

IP66 Marine LED Searchlight

Features

- Protection class: IP66
- Irradiation distance: T2H ≥800M (1LUX) ≥1600m(0.25LUX) Beam angle: 4°
- Slip-rings provide continuous 360° horizontal rotation with no stop points
- Auto-return to home position
- Auto-scan with user programmability
- Advanced proportional-speed control
- Approved for temperatures down to -40°C and up to +55°C
- Materials: marine grade aluminum and stainless steel with salt-resistant powder coat finish Lower
- power consumption: LED's consume 75% or more less power than Halogen lamps
-
- Longer life: LED's last tens-of-thousands of hours compared to approximately 250 to 750 hours depending upon the Halogen lamp. This reduces lamp replacement costs, increases reliability

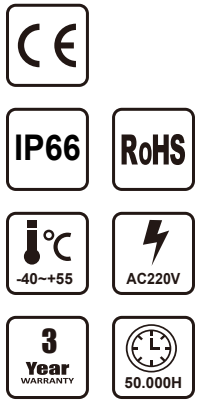

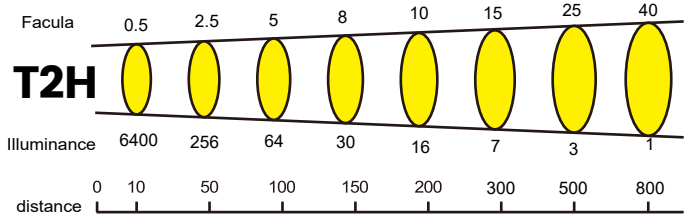

Applications

- National defense
- Marine
- Military
- Water conservation
- Expedition and oil field
- Wharf
- Large surface warship
- Maritime search and rescue

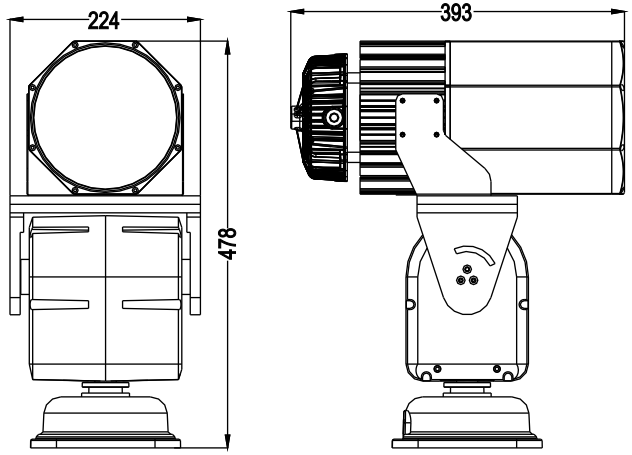



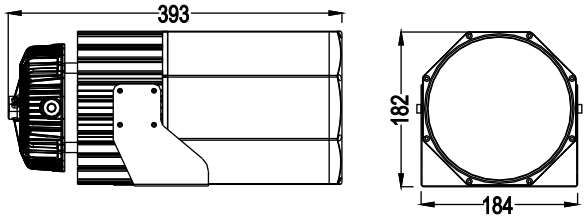



Specifications

Model		DADS-SL200w-4°
Light Information	Light Source	LED
	Power Consumption	200W
	Color Temperature	6500K
	Input Voltage	AC 220V 50/60HZ/DC12V
	Working Temperature	-40°C～+55°C
	IP Rating	IP66
	Lifespan	>50,000 hours
	Beam Angle	4°
	Beam Distance	≥800m(1LUX)
	Weight	12Kg
	Material	1060AL
	Product Size (mm)	470*393*224mm
	Packing Size (mm)	600*400*400mm
	Quantity/carton	1PCS
Cloud Platform (Optional)	Adjustable Speed	Horizontal: 9°/S, Vertical: 6°/S
	Adjustable Angle	Horizontal: 0~360°, Vertical: +15°～-30° OPTION: (-90°/+15°)
	Repeated Positioning Accuracy	±1°